


STM-104T-AL

Rugged 10.4" LCD Touch Monitor with Aluminum bezel

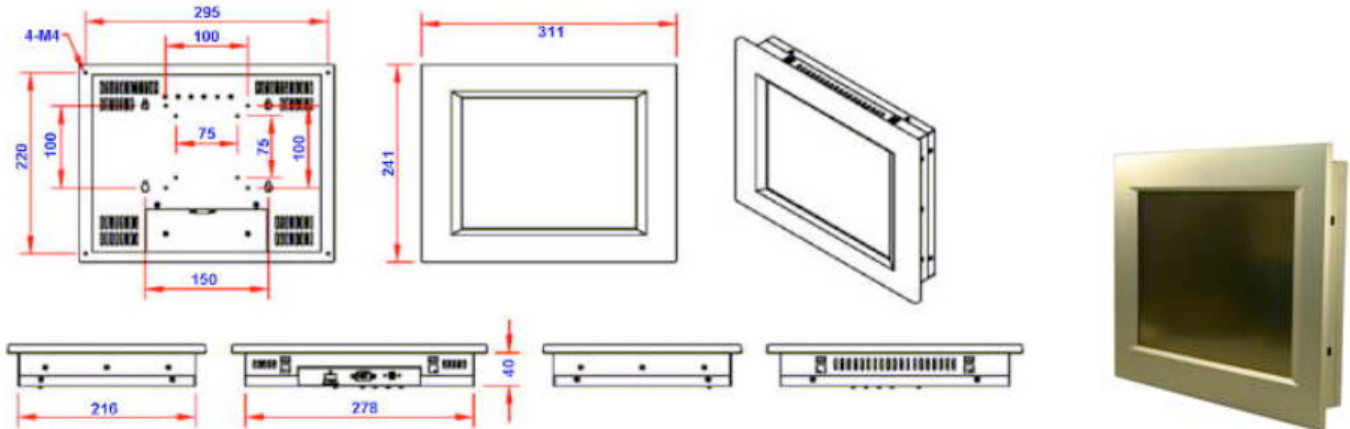

Specifications

LCD Display size:

10.4" TFT LCD color display

LCD Resolution:

640 x 480 resolution, 350 cd/m² high brightness
800 x 600 resolution, 180 cd/m² brightness

Number of colors:

262,144

Backlight tube:

About 40,000 hours

Brightness of LCD (Luminance):

200 μ V 250 cd/m² high brightness, with high colors

Optional: Sunlight readable 1600 cd/m² available

Sunlight readable 1600 nits (cd/m²) LCD monitor

IP and NEMA water-resisting Rating:

Meets IP-65, 66, 67, 68 and NEMA-4, 12 water and dust-resistant protection ratings.

Touch Screen: Optional

Long life 5-wire analog resistive touch screen
Resolution: 4094 x 4096
Touch life: 10,000,000 touch times
Interface: USB or Serial ports
Option: Capacitive touch screen

Wall-mounting method:

Meets industrial standard VESA-75 and VESA-100

VGA port:

Standard 15-pin female D-sub VGA connector output supported

DVI or BNC connector:

Available for your request

Speakers:

2 built-in stereo speakers
1 Audio jack

Anti-vibration and anti-shock resistant:

High anti-vibration and anti-shock resistant

Power Supply:

Supports 100 -240V AC auto-range power supply

Operating and Storage Temperature:

- a) Operating temperature: -10 ~ + 50 degrees C
- b) Storage temperature: -40 ~ +85 degrees C

Order information:

STM-104T-AL: with Aluminum bezel and Touch screen
STM-104T: without Aluminum bezel
STM-104T-AL-15N: with aluminum bezel, 1500 Nits display
STM-104T-AL-HT: with Aluminum bezel, with Heater module to boot up at -20 deg. C.
STM-104T-AL-HT-DM: with Aluminum bezel, with Heater module to boot up at -20 degrees C, with brightness dimmer 100% - 50% or 100% - 0% depending on your request.

Scriptel Corporation
4153 Arlingate Plaza
Columbus, OH 43228 USA
+1 614.276.8402
+1 614.276.7615 Fax
www.scriptel.com