


STM-120T-AL

Rugged 12.1" LCD Touch Monitor with Aluminum bezel

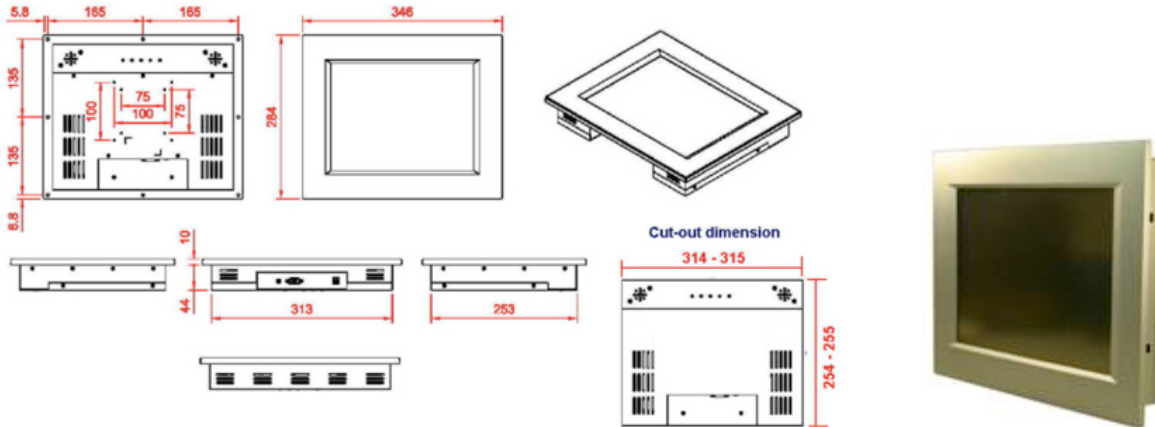

Specifications

LCD Display size:

12.1" TFT LCD color display

LCD Resolution:

1024 x 768 resolution Super VGA resolution

Brightness of LCD (Luminance):

200 μ V 250 cd/m² high brightness, with high colors

Optional: Sunlight readable 1600 cd/m² available

Sunlight readable 1600 nits (cd/m²) LCD monitor

IP and NEMA water-resisting Rating:

Meets IP-65, 66, 67, 68 and NEMA-4, 12 water and dust-resistant protection ratings.

Touch Screen: Optional

Long life 5-wire analog resistive touch screen

Resolution: 4096 x 4096

Touch life: 10,000,000 touch times

Interface: USB or Serial ports

Option: Capacitive touch screen

Wall-mounting method:

Meets industrial standard VESA-75 and VESA-100

VGA port:

Standard 15-pin female D-sub VGA connector output supported

DVI or BNC connector:

Available for your request

Speakers:

Built in 2 x speakers, and 1 audio jack

Anti-vibration and anti-shock resistant:

High anti-vibration and anti-shock resistant

Power Supply:

Supports 100 -240V AC auto-range power supply

Operating and Storage Temperature:

a) Operating temperature: 0 ~ + 50 degrees C

b) Storage temperature: -40 ~ +85 degrees C

Order information:

STM-120-AL: with Aluminum bezel

STM-120T-AL: with Aluminum bezel and Touch

Scriptel Corporation
4153 Arlingate Plaza
Columbus, OH 43228 USA
+1 614.276.8402
+1 614.276.7615 Fax
www.scriptel.com